PRECISION MEASUREMENTS


BAYONET TYPE


For Use To 800°F

WITH ADJUSTABLE LENGTH-SPRING TYPE

- Cuts inventory cost. Fits hole depths from 1" to 10".
- Bayonet cap turns to desired length.
- Forms to any angle.

Grounded hot junction.



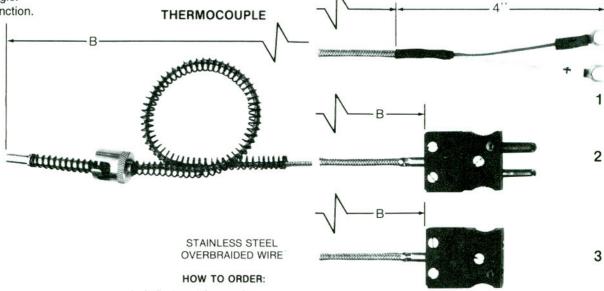


- *For dual element add suffix "D" to catalog
- 1. Indicate catalog number.
- 2. Specify "B" length.


WITH ADJUSTABLE LENGTH-FLEX HOSE TYPE

- Same advantages as above but not as flexible.
- Bayonet cap turns over entire length.
- Not as much spring tension as spring type above.
- Grounded hot junction.

Catalog Number Terminal Style L08-14 1 L08-15 2 L08-16 3

THERMOCOUPLE



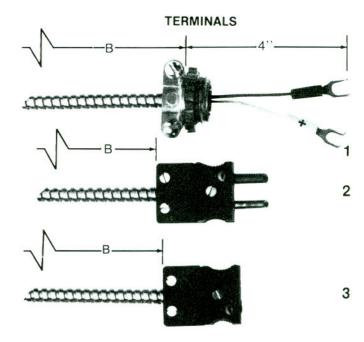

TERMINALS

HOW TO ORDER:

- 1. Indicate catalog number.
- 2. Specify "B" length.

For dual element add suffix "D" to catalog number.

NOTE: Calibration is ISA standard grade Type J Iron-Constantan. Type T Copper-Constantan and Type K Chromel-Alumel can be furnished on request. Stainless Steel Construction, 3/_{1e}" rigid and flexible tubing: 20 gauge fiberglass insulated wire. Adaptors are not furnished with thermocouples and must be ordered separately.